
Actek® Manufacturing & Engineering
1110 Fullerton Road
City of Industry, CA 91748

Toll Free: 800-752-7229
Phone: 626-581-3424
Fax: 626-581-3423
Email: sales@actekmfg.com
Website: www.actekmfg.com


Item # 46018, Safety Swivel Hoist Ring



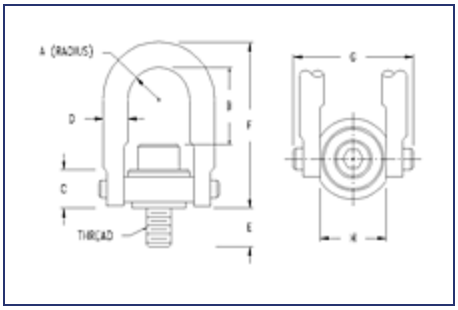

Specifications | Features

SPECIFICATIONS

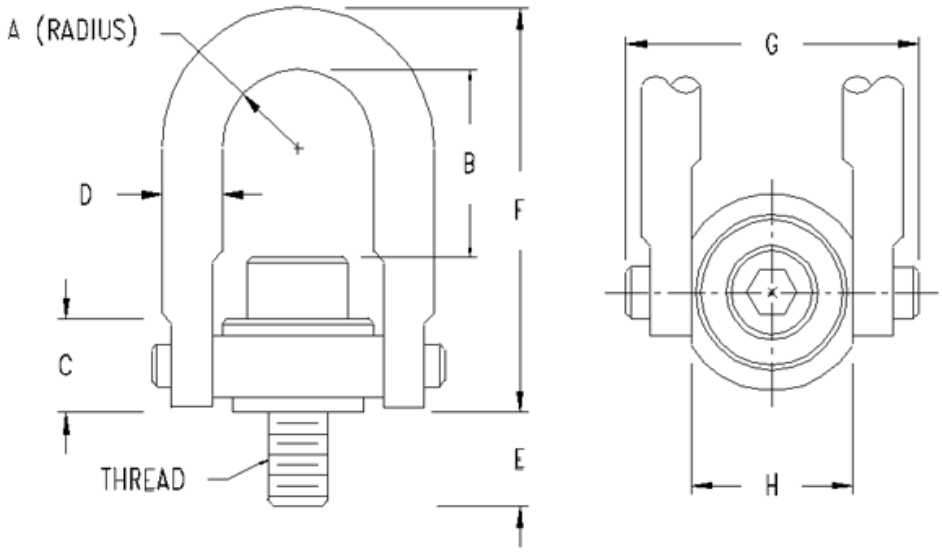Dimension Drawing	 Safety Swivel Hoist Ring
U-Bar (D)	3/4
Rated Load	5,000 lbs
Thread Size	3/4" - 10
Thread Protrusion (E)	1.53 in
Bushing Head Diameter	1.45 in
B	2.06 in
A	0.88 in
C	1.22 in
F	4.78 in
G	3.52 in
H	1.99 in
Torque	100 ft-lbs
Type	Standard U-Bar
Material	Aircraft Quality Alloy

Swivels Angle	360 º
Pivots Angle	180 º
Safety Factor	5:1
Finish	Black Oxide per MIL Specification (Cadmium Plated Available)
Applicable Screw P/N	46058
Actek Manufacturer Number	AK46018
Product	Safety Swivel Hoist Ring
Weight	3 lbs

FEATURES

- Swivels 360° - Pivots 180°
- Material : Aircraft Quality Alloy
- Finish : Black Oxide per MIL Specification (Cadmium Plated Available)
- Safety Factor : 5:1
- Magnetic Particle Inspected
- Certified Heat Treatment
- Meets or Exceeds ASME B30.26
- Conforms to CE