

CAT NO

124MB


CUSTOMER DIMENSIONS

DO NOT
SEPARATE
PRINT FROM
WORK

LOT NO

OPER

TOOLS

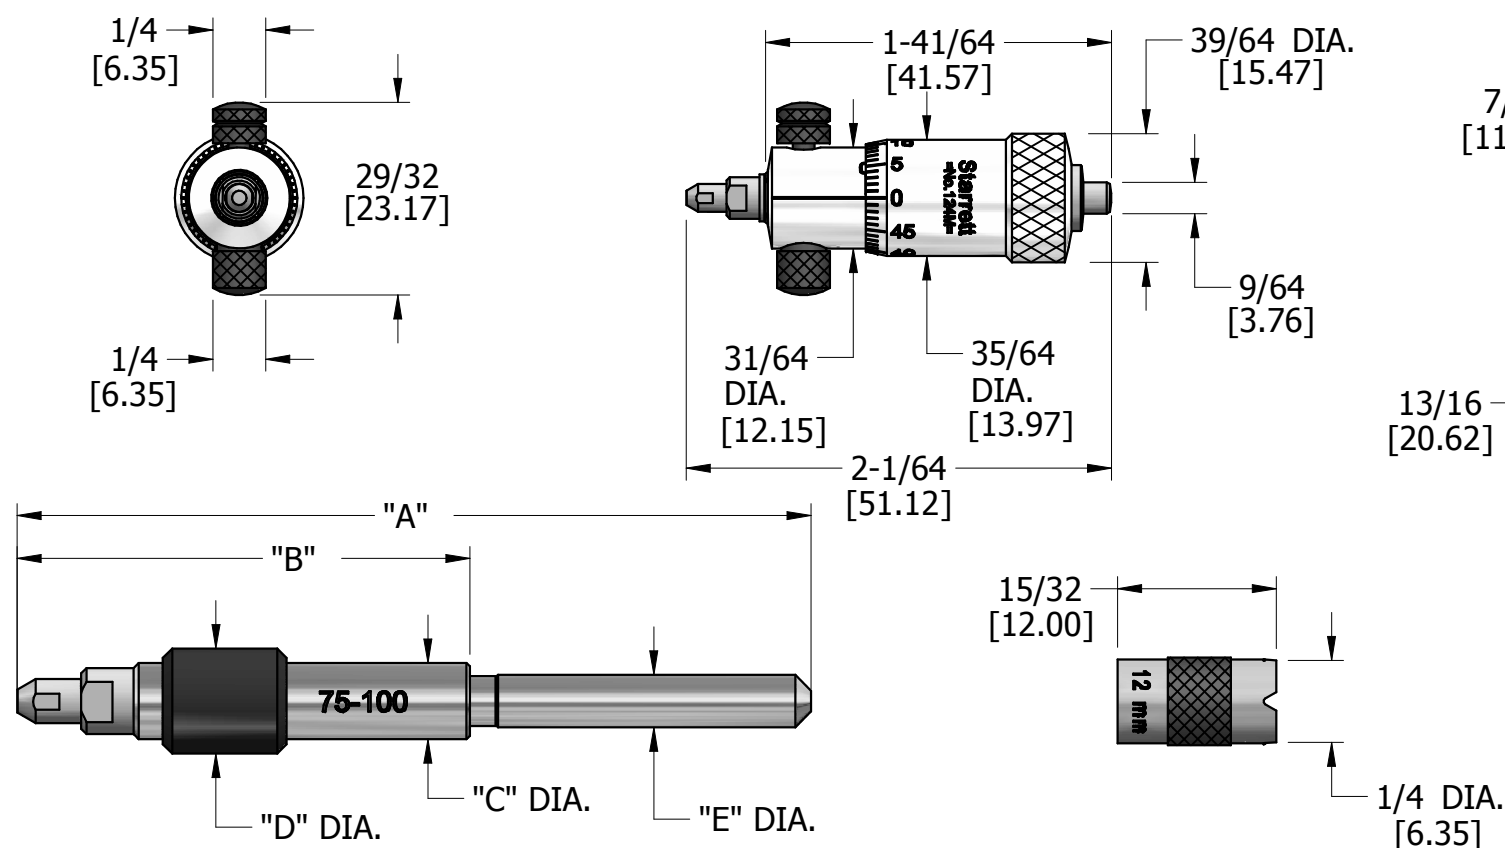

RODS (DIMS IN mm)

SIZE	DIM"A"	DIM"B"	DIM"C"	DIM"D"	DIM"E"
50-75mm	34.53	8.73	5.95	7.94	3.97
75-100mm	59.93	34.13	5.95	7.94	3.97
100-125mm	85.33	59.53	5.95	7.94	3.97
125-150mm	110.73	84.93	5.95	7.94	3.97
150-175mm	136.13	110.33	5.95	7.94	3.97
175-200mm	161.53	135.73	5.95	7.94	3.97
200-225mm	186.93	161.13	5.95	7.94	3.97
225-250mm	212.33	186.53	5.95	7.94	3.97
250-275mm	237.73	211.93	5.95	7.94	3.97
275-300mm	263.13	237.33	5.95	7.94	3.97

TOLERANCES - UNLESS
OTHERWISE SPECIFIED1 PLACE DEC. or REF. : +/- .015" --- 0.4 mm
2 PLACE DEC. : +/- .010" --- 0.25 mm3 PLACE DEC. : +/- .003" --- 0.08 mm
4 PLACE DEC. : +/- .0005" --- 0.01 mmFRACTIONAL: +/- 1/64"
ANGULAR: +/- 1 DEGREE

REV	DESCRIPTION	DATE	BY
DR	WRB	CHK WEC	DATE 8-24-62

INSIDE MICROMETER
METRIC ASSEMBLYTHE L.S. STARRETT CO.
ATHOL, MASS.